


MICHELIN TRUCK TIRE LOAD & INFLATION CHARTS

AUTO HAULER

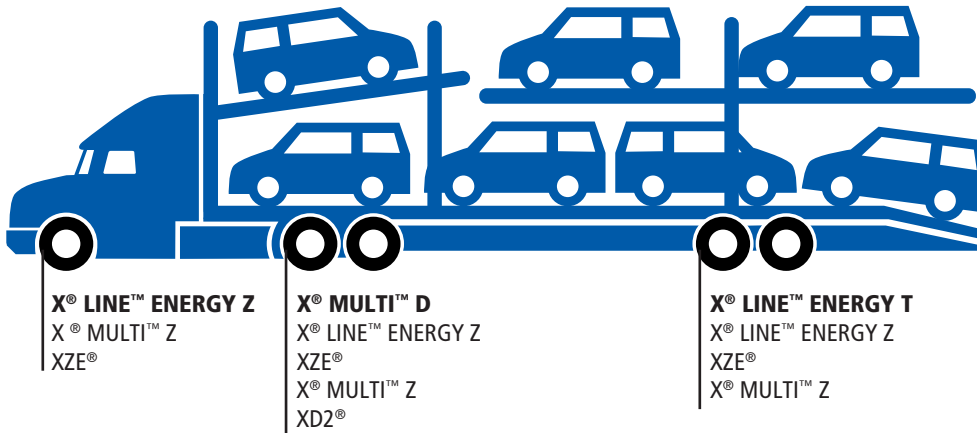

To select the proper load and inflation table, locate your tire size in the following pages, then match your tire's sidewall markings to the table with the same sidewall markings. If your tire's sidewall markings do not match any table listed, please contact your Michelin dealer for the applicable load and inflation table.

Industry load and inflation standards are in a constant state of change, and Michelin continually updates its product information to reflect these changes. Printed material may not reflect the latest load and inflation standards.

NOTE: Never exceed the wheel manufacturer's maximum pressure limitation.

S = Single configuration, or 2 tires per axle.

D = Dual configuration, or 4 tires per axle.

Loads are indicated per axle.

Wheel Diameter 19.5"	PSI	65	70	75	80	85	90	95	100	105	110	115	120	MAXIMUM LOAD AND PRESSURE ON SIDEWALL
	kPa	450	480	520	550	590	620	660	690	720	760	790	830	
265/70R19.5 LRG X MULTI D X MULTI Z	LBS SINGLE	7140	7510	8000	8370	8860	9210	9700	10050	10380	10840			S 5510 LBS AT 112 PSI
	LBS DUAL	13470	14170	15120	15800	16730	17410	18290	18950	19620	20480			D 5205 LBS AT 112 PSI
	KG SINGLE	3240	3410	3630	3800	4020	4180	4400	4560	4710	4920			S 2500 KG AT 775 kPa
	KG DUAL	6110	6430	6860	7170	7590	7900	8300	8600	8900	9290			D 2360 KG AT 775 kPa
265/70R19.5 LRH X LINE ENERGY T	LBS SINGLE			8250	8680	9110	9540	9960	10380	10790	11200	11610	12010	S 6005 LBS AT 123 PSI
	LBS DUAL			15580	16420	17220	18040	18840	19620	20400	21180	21940	22700	D 5675 LBS AT 123 PSI
	KG SINGLE			3740	3920	4140	4320	4540	4700	4860	5080	5240	5450	S 2725 KG AT 850 kPa
	KG DUAL			7080	7400	7840	8160	8560	8880	9200	9600	9920	10300	D 2575 KG AT 850 kPa
285/70R19.5 LRH X MULTI D X MULTI Z	LBS SINGLE			8920	9340	9870	10270	10800	11190	11570	12100	12470	12980	S 6610 LBS AT 123 PSI
	LBS DUAL			16660	17430	18430	19180	20170	20890	21620	22570	23280	24220	D 6175 LBS AT 123 PSI
	KG SINGLE			4050	4240	4480	4660	4900	5080	5250	5490	5660	5890	S 3000 KG AT 850 kPa
	KG DUAL			7560	7910	8360	8700	9150	9480	9810	10240	10560	10990	D 2800 KG AT 850 kPa

Wheel Diameter 22.5"	PSI	80	85	90	95	100	105	110	115	120	125	130	MAXIMUM LOAD AND PRESSURE ON SIDEWALL
	kPa	550	590	620	660	690	720	760	790	830	860	900	
255/70R22.5 LRH XZE XD2	LBS SINGLE	8380	8740	9100	9350	9790	10130	10410	10800	11020			S 5510 LBS AT 120 PSI
	LBS DUAL	15880	16440	17100	17640	17820	18440	18700	19660	20280			D 5070 LBS AT 120 PSI
	KG SINGLE	3800	3960	4120	4240	4440	4600	4720	4900	5000			S 2500 KG AT 830 kPa
	KG DUAL	7200	7440	7760	8000	8080	8360	8480	8920	9200			D 2300 KG AT 830 kPa
295/60R22.5 LRJ X LINE ENERGY Z	LBS SINGLE		10520	11010	11500	11980	12460	12930	13400	13860	14320	14780	S 7390 LBS AT 130 PSI
	LBS DUAL		19300	20200	21100	21980	22860	23720	24580	25440	26280	27120	D 6780 LBS AT 130 PSI
	KG SINGLE		4770	4990	5220	5430	5650	5860	6080	6290	6460	6700	S 3350 KG AT 900 kPa
	KG DUAL		8750	9160	9570	9970	10370	10760	11150	11540	11880	12300	D 3075 KG AT 900 kPa

