



LINE HAUL APPLICATIONS

THE MICHELIN® X® LINE ENERGY Z 295

An ultra fuel efficient, all position tire that also provides high mileage and enhanced casing durability.

Line Haul	Regional	Urban	On/Off Road
Recommended	Acceptable		



.....
**MAXIMIZED
FUEL
EFFICIENCY**

.....
**ENHANCED
TREAD LIFE**

.....
**CASING
DURABILITY**
.....



THE MICHELIN® X® LINE ENERGY Z 295

CASING DURABILITY

Infini-Coil™ Belt Technology


- Optimizes the shape of the contact patch for longer tread life and strengthens the crown against shocks and impacts

Advanced Tensile Technology

- Helps to improve the strength of the belt package

Shock Pad

- An increased layer of protection between the protector ply and the belt package to help absorb the forces of impacts and shocks

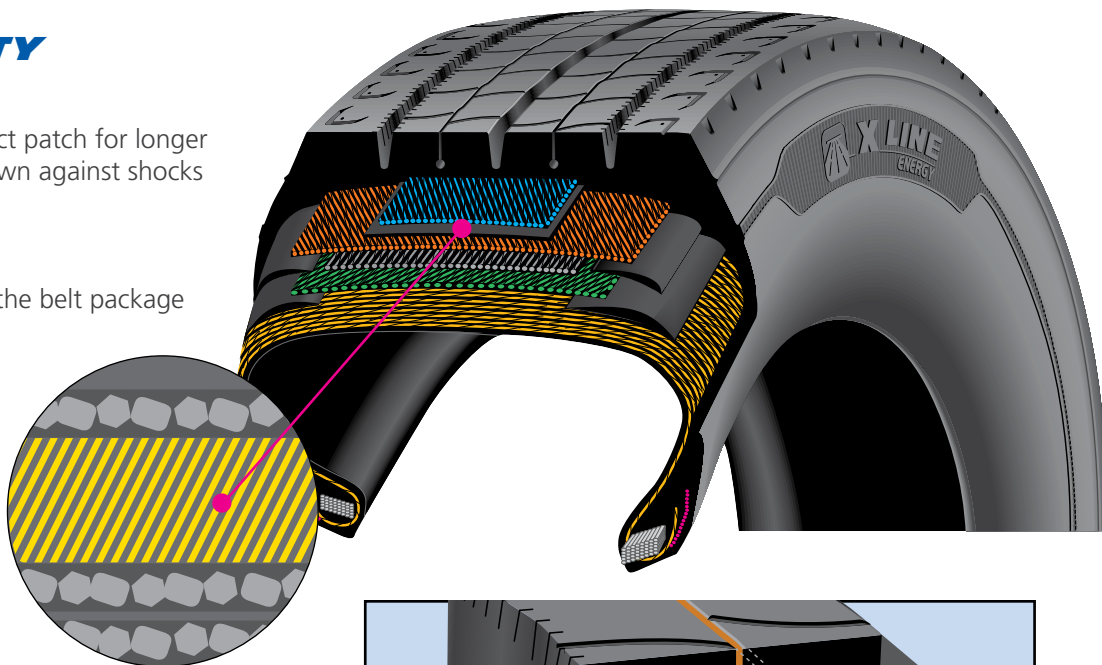

ENHANCED TREAD LIFE



17% improvement in wear life versus the MICHELIN® XZA®2 Energy tire in the 295/60R22.5 LRJ size. (1)

Improved Compounding

- Combining the latest Michelin Advanced Technology compounds and innovative tread design features to deliver increased removal miles

Miniature Groove Sipes

- Resist the onset of irregular wear

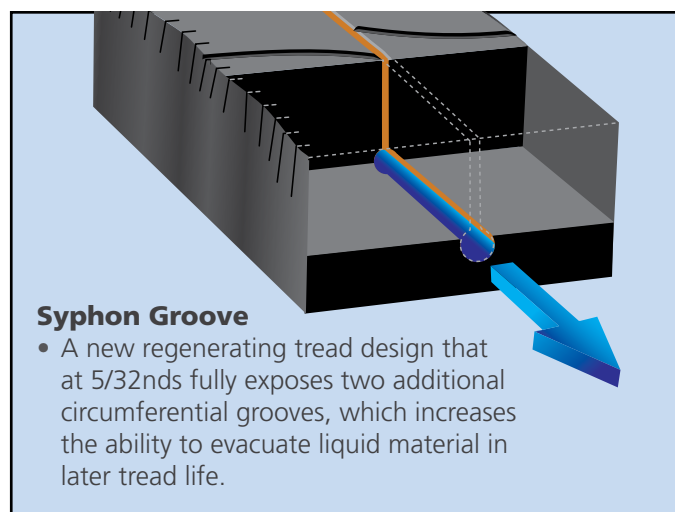

Syphon Groove

- A new regenerating tread design that at 5/32nds fully exposes two additional circumferential grooves, which increases the ability to evacuate liquid material in later tread life.

MAXIMIZED FUEL EFFICIENCY

Better Miles per Gallon

- 26% reduction in rolling resistance compared to the MICHELIN® XZA®2 Energy tire (2)

Fuel Efficient (3) Casing Flex Technology

- Make this tire ultra fuel efficient when combined with our Advanced Technology compounding

Line Haul	Regional	Urban	On/Off Road
Recommended	Acceptable		

Size	Load Range	Catalog Number	Tread Depth	Max. Speed (*)	Loaded Radius		Overall Diameter		Overall Width (‡)		Approved Wheels (Measuring wheel listed first.)	Min. Dual Spacing (‡)		Revs Per Mile	Max. Load and Pressure Single				Max. Load and Pressure Dual			
			32nds	mph	in.	mm	in.	mm	in.	mm		in	mm		lbs.	psi	kg.	kPa	lbs.	psi	kg.	kPa
295/60R22.5	J	35378	14	75	16.7	425	36.1	917	11.8	299	9.00, 9.75	13.3	338	570	7390	130	3350	900	6780	130	3075	900

(1) Based on Michelin internal wear tests and extrapolation for tire size 295/60R22.5. Actual results may vary.

(2) Michelin internal testing.

(3) Based on industry standard rolling resistance testing of comparable trailer tires. Actual results may vary, and may be impacted by many factors, to include road conditions, weather and environment, driver performance, etc.

(*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(‡) Overall width will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations.

MNA, Inc. continually updates its product information to reflect any changes in Industry Standards. Printed material may not reflect the current Load and Inflation information. Please visit www.michelintruck.com for the latest product information. The actual load and inflation pressure used must not exceed the wheel manufacturer's maximum conditions. Never exceed a wheel manufacturer's limits without permission from the component manufacturer.

