



LINE HAUL APPLICATIONS

# **THE MICHELIN® XDN®2 TIRE**

All weather premium drive tire optimized for exceptional traction and mileage in line haul applications.

Line Haul	Regional	Urban	On/Off Road
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Recommended	Acceptable		



# THE MICHELIN® XDN®2 TIRE

All weather premium drive tire optimized for exceptional traction and mileage in line haul applications.

## Exceptional Mileage –


- Long tread life
- **Next-generation application specific compounds**
- **Unique tread design**
- **Wide open shoulder grooves**  
Tread life and traction

## Exceptional Handling –

- Excellent traction and stability
- **Wide open shoulder grooves**  
Traction and tread life
- **Matrix siping technology**  
Traction and stability
- **Extra-wide tread**


## Matrix Siping

Matrix sipes provide inter-locking action which offers excellent traction and even wear.

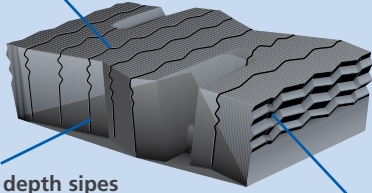

Full depth sipes help provide excellent traction throughout the life of the tread.

Zig-Zag groove walls help provide optimized biting edges and excellent water and snow evacuation.

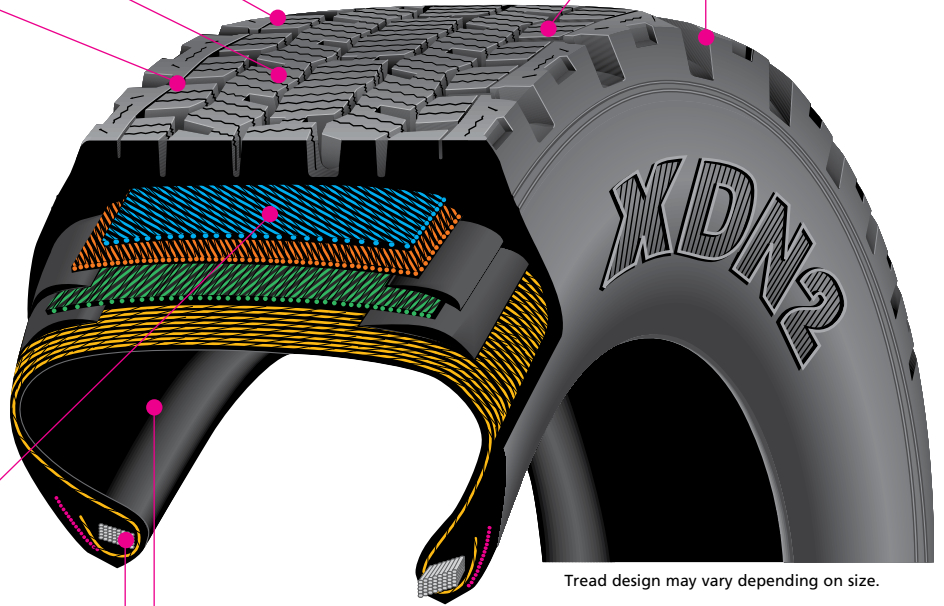

Tread design may vary depending on size.

## Extended Casing Life –

- Longer life and retreadability
- **Full-width elastic protector ply**
- **Rectangular bead bundle**  
- Reduces heat and fatigue  
- Michelin exclusive
- **Enhanced inner liner**
- **Robust bead area**

Size	Load Range	Catalog Number	Tread Depth 32nds	Max. Speed (*) mph	Loaded Radius		Overall Diameter		Overall Width (‡)		Approved Wheels (Measuring wheel listed first.)	Min. Dual Spacing		Revs Per Mile	Max. Load and Pressure Single				Max. Load and Pressure Dual			
					in.	mm	in.	mm	in.	mm		in.	mm		in.	mm	lbs.	psi	kg.	kPa	lbs.	psi
11R22.5 (1)	G	72805	27	75	19.5	495	41.7	1060	11.2	284	8.25, 7.50	12.5	318	496	6175	105	2800	720	5840	105	2650	720
11R22.5 (1)	H	64321	27	75	19.5	495	41.7	1060	11.2	284	8.25, 7.50	12.5	318	496	6610	120	3000	830	6005	120	2725	830
12R22.5 (1)	H	51753	27	75	20.0	508	42.9	1089	11.3	287	8.25, 9.00	13.2	335	483	7390	120	3350	830	6780	120	3075	830
275/80R22.5 (1)	G	63465	27	75	18.9	481	40.6	1030	11.0	279	8.25, 7.50	12.2	311	511	6175	110	2800	760	5675	110	2575	760
315/80R22.5 (2,3)	L	04355	28	75	20.0	507	43.1	1094	12.5	317	9.00, 9.75	13.8	351	486	9090	130	4125	900	8270	130	3750	900
11R24.5 (1)	H	87129	27	75	20.5	522	43.8	1112	11.2	284	8.25, 7.50	12.5	318	473	7160	120	3250	830	6610	120	3000	830
275/80R24.5 (1)	G	75684	27	75	19.6	497	41.8	1061	10.6	270	8.25, 7.50	12.2	311	495	6175	110	2800	760	5675	110	2575	760

Note: Wheel listed first is the measuring wheel.

(1) MICHELIN® XDN®2 tread design (non-directional).

(2) MICHELIN® XDN®2 Grip tread design (directional).

(3) Not approved for use with an 8.25 wheel.

(\*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(‡) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations.

MNA, Inc. continually updates its product information to reflect any changes in Industry Standards. Printed material may not reflect the current Load and Inflation information. Please visit [www.michelintruck.com](http://www.michelintruck.com) for the latest product information. The actual load and inflation pressure used must not exceed the wheel manufacturer's maximum conditions. Never exceed a wheel manufacturer's limits without permission from the component manufacturer.

TO FIND OUT MORE  
[michelintruck.com](http://michelintruck.com)

FACEBOOK FIND US ON FACEBOOK  
[michelintruck.com](http://michelintruck.com)

@ CONTACT US BY EMAIL  
[michelintruck.com/contact-us/](mailto:michelintruck.com/contact-us/)

TELEPHONE CONTACT US BY TELEPHONE  
1-888-622-2306