



# MEGAXBIB®

**EXCELLENT SOLUTION FOR HARVESTERS AND HEAVY EQUIPMENT**



Combines



Floaters



## LOAD CAPACITY

- Up to 67,460 lbs<sup>1</sup> per axle



## ENDURANCE

- Up to +46%<sup>2</sup> vs main competitor



## COMFORT

- Flexible sidewalls for a smooth, comfortable ride




## STEEL CROWN BELTS


- Great stability
- Excellent puncture resistance and optimized load distribution



### Conventional Architecture

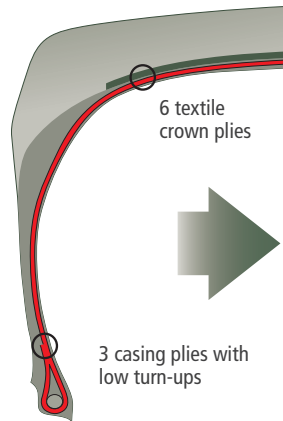

### MICHELIN MEGAXBIB, an Innovative Construction

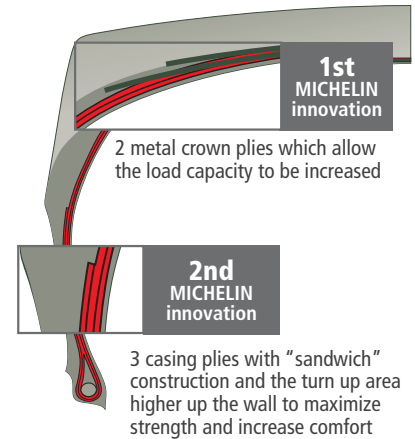

(1) 1050/50 R32 184A8/184B - 6 mph cyc

(2) Internal test (Ladoux - France) study on 800/65R32 178A8/178B

## SIZES

620/75 R26 166A8/166B TL

750/65 R26 171A8/171B TL

620/75 R30 168A8/168B TL

650/75 R32 172A8/172B TL

800/65 R32 178A8/178B TL

800/70 R32 181A8/181B TL

900/60 R32 181A8/181B TL

1050/50 R32 178A8 TL M28

800/70 R32 181A8/181B TL

620/75 R34 170A8/170B TL

710/75 R34 178A8/178B TL

620/70 R38 170A8/170B TL

520/85 R42 162A8/162B TL

580/85 R42 168A8/168B TL

# MEGAXBIB®

Tire specifications and pressure table. Load per tire in lbs.\*

Rim Size (inch)		Description										MSPN (CAI)			
26		620/75 R26 166A8/166B TL										89936 (614320)			
Section Width	Overall Diam. (in.)	Loaded Radius (in.)	Rolling Circum. (in.)	Recommended Rim	Acceptable Rims					Min. Dual / Triple Spacing (in.)	75% internal volume (gal.)	Tread depth (32nd in.)			
23.1	63.1	28	186.9	DW20B (A)	DW18L					31.5	136.3	58			
<b>Psi</b>	<b>15</b>	<b>19</b>	<b>23</b>	<b>28</b>	<b>32</b>	<b>33</b>	<b>35</b>	<b>36</b>	<b>38</b>	<b>39</b>	<b>41</b>	<b>42</b>	<b>46</b>	<b>51</b>	<b>55</b>
6 mph Cyc	9720	10625	11530	12665	13800	14185	14560	14935	15320	15695	16070	16455	17595	18730	19865
6 mph	8620	9710	10805	11720	12630	12940	13250	13560	13855	14165	14475	14770	15695	16610	17525
15 mph	6990	7960	8930	9690	10440	10690	10945	11200	11455	11705	11960	12205	12965		
20 mph	6745	7670	8600	9325	10065	10305	10550	10790	11035	11275	11530	11775	12500		
25 mph	6305	7165	8025	8710	9405	9625	9855	10085	10320	10540	10770	11000	11685		
30 mph	6305	7165	8025	8710	9405	9625	9855	10085	10320	10540	10770	11000	11685		

Rim Size (inch)		Description										MSPN (CAI)			
26		750/65 R26 171A8/171B TL										36798 (983217)			
Section Width	Overall Diam. (in.)	Loaded Radius (in.)	Rolling Circum. (in.)	Recommended Rim	Acceptable Rims					Min. Dual / Triple Spacing (in.)	75% internal volume (gal.)	Tread depth (32nd in.)			
28.8	63.8	28.7	189.7	DW25B (A)						37.6	178.8	58			
<b>Psi</b>	<b>15</b>	<b>19</b>	<b>23</b>	<b>28</b>	<b>32</b>	<b>33</b>	<b>35</b>	<b>36</b>	<b>38</b>	<b>39</b>	<b>41</b>	<b>42</b>	<b>46</b>	<b>51</b>	<b>55</b>
6 mph Cyc	10870	12930	14715	16225	17460	17855	18265	18675	19070	19435	19785	20150	21140	22090	23050
6 mph	9590	11200	12700	14065	15300	15675	16060	16445	16820	17140	17460	17770	18650	19500	20340
15 mph	7960	9205	10440	11550	12410	12710	12995	13295	13580	13825	14065	14320	15045		
20 mph	7670	8875	10075	11145	11950	12235	12520	12810	13095	13325	13570	13800	14505		
25 mph	7165	8290	9405	10405	11175	11440	11705	11970	12235	12455	12675	12895	13560		
30 mph	7165	8290	9405	10405	11175	11440	11705	11970	12235	12455	12675	12895	13560		

Rim Size (inch)		Description										MSPN (CAI)			
30		620/75 R30 168A8/168B TL										63928 (753673)			
Section Width	Overall Diam. (in.)	Loaded Radius (in.)	Rolling Circum. (in.)	Recommended Rim	Acceptable Rims					Min. Dual / Triple Spacing (in.)	75% internal volume (gal.)	Tread depth (32nd in.)			
23.8	67.3	30.3	200.1	DW20B (A)	DW18L					31.5	147.7	58			
<b>Psi</b>	<b>15</b>	<b>19</b>	<b>23</b>	<b>28</b>	<b>32</b>	<b>33</b>	<b>35</b>	<b>36</b>	<b>38</b>	<b>39</b>	<b>41</b>	<b>42</b>	<b>46</b>	<b>51</b>	<b>55</b>
6 mph Cyc	10275	11220	12170	13370	14575	14980	15375	15775	16180	16580	16975	17385	18585	19785	20990
6 mph	9105	10250	11400	12370	13340	13670	13990	14310	14640	14960	15280	15610	16580	17550	18520
15 mph	7410	8410	9415	10220	11025	11290	11550	11815	12090	12355	12620	12885	13690		
20 mph	7145	8115	9085	9855	10625	10890	11145	11400	11660	11915	12180	12435	13205		
25 mph	6680	7585	8490	9215	9930	10175	10415	10660	10900	11145	11385	11620	12345		
30 mph	6680	7585	8490	9215	9930	10175	10415	10660	10900	11145	11385	11620	12345		

Rim Size (inch)		Description										MSPN (CAI)			
32		650/75 R32 172A8/172B TL										46686 (468227)			
Section Width	Overall Diam. (in.)	Loaded Radius (in.)	Rolling Circum. (in.)	Recommended Rim	Acceptable Rims					Min. Dual / Triple Spacing (in.)	75% internal volume (gal.)	Tread depth (32nd in.)			
25.9	71.9	32.3	213.5	DW21B (A)	DW20B (A), DW23B (A)					34.4	184.4	74			
<b>Psi</b>	<b>15</b>	<b>19</b>	<b>23</b>	<b>28</b>	<b>32</b>	<b>33</b>	<b>35</b>	<b>36</b>	<b>38</b>	<b>39</b>	<b>41</b>	<b>42</b>	<b>46</b>	<b>51</b>	<b>55</b>
6 mph Cyc	10805	12590	14375	15630	16900	17315	17735	18155	18575	18995	19410	19830	21085	22355	23610
6 mph	9920	11510	13095	14155	15200	15555	15905	16260	16610	16965	17315	17670	18730	19775	20835
15 mph	8005	9335	10670	11565	12445	12745	13040	13340	13635	13935	14230	14515	15410		
20 mph	7715	9005	10295	11155	12005	12290	12575	12865	13150	13435	13725	14000	14860		
25 mph	7230	8420	9610	10415	11220	11485	11750	12015	12290	12555	12820	13085	13890		
30 mph	7230	8420	9610	10415	11220	11485	11750	12015	12290	12555	12820	13085	13890		

\* Refer to the notes at the end of the tables of this range

# MEGAXBIB®

Tire specifications and pressure table. Load per tire in lbs.\*

Rim Size (inch)		Description										MSPN (CAI)			
32		800/65 R32 178A8/178B TL										49342 (521809)			
Section Width	Overall Diam. (in.)	Loaded Radius (in.)	Rolling Circum. (in.)	Recommended Rim	Acceptable Rims						Min. Dual / Triple Spacing (in.)	75% internal volume (gal.)	Tread depth (32nd in.)		
31.2	72.4	32.4	214.9	DW27B (A)	DHB27, DW25B (A)						39.7	238.5	71		
<b>Psi</b>	<b>15</b>	<b>19</b>	<b>23</b>	<b>28</b>	<b>32</b>	<b>33</b>	<b>35</b>	<b>36</b>	<b>38</b>	<b>39</b>	<b>41</b>	<b>42</b>	<b>46</b>	<b>51</b>	<b>55</b>
6 mph Cyc	12930	15610	18275	19575	20880	21310	21740	22210	22675	23150	23610	24065	25410	26765	28110
6 mph	11410	13360	15300	16755	18210	18695	19180	19600	20005	20425	20835	21230	22420	23610	24800
15 mph	9790	11385	12975	13890	14815	15115	15420	15785	16160	16525	16885	17250	18355		
20 mph	9435	10970	12500	13380	14275	14560	14860	15210	15575	15930	16280	16635	17690		
25 mph	8820	10250	11685	12510	13340	13615	13890	14220	14550	14880	15210	15545	16535		
30 mph	8820	10250	11685	12510	13340	13615	13890	14220	14550	14880	15210	15545	16535		

Rim Size (inch)		Description										MSPN (CAI)			
32		800/70 R32 181A8/181B TL										68880 (695992)			
Section Width	Overall Diam. (in.)	Loaded Radius (in.)	Rolling Circum. (in.)	Recommended Rim	Acceptable Rims						Min. Dual / Triple Spacing (in.)	75% internal volume (gal.)	Tread depth (32nd in.)		
31.2	76.2	34.3	225.4	DW27B (A)	DW25B (A)						39.7	255.2	73		
<b>Psi</b>	<b>15</b>	<b>19</b>	<b>23</b>	<b>28</b>	<b>32</b>	<b>33</b>	<b>35</b>	<b>36</b>	<b>38</b>	<b>39</b>	<b>41</b>	<b>42</b>	<b>46</b>	<b>51</b>	<b>55</b>
6 mph Cyc	14055	17240	20425	21970	23425	23900	24360	24735	25110	25485	25860	26365	27890	29400	30920
6 mph	12400	14715	17030	19465	20890	21195	21495	21825	22155	22485	22820	23270	24605	25950	27280
12.5 mph	11760	14020	16270	17185	18100	18400	18705	19170	19620	20085	20545	21000	22375		
15 mph	10615	12655	14685	15510	16335	16610	16885	17305	17715	18135	18540	18960	20195		
20 mph	10320	12235	14155	14945	15740	16005	16270	16665	17075	17470	17870	18265	19465		
25 mph	9645	11440	13230	13975	14715	14970	15210	15585	15960	16325	16700	17075	18190		

Rim Size (inch)		Description										MSPN (CAI)			
32		900/60 R32 181A8/181B TL										40581 (824122)			
Section Width	Overall Diam. (in.)	Loaded Radius (in.)	Rolling Circum. (in.)	Recommended Rim	Acceptable Rims						Min. Dual / Triple Spacing (in.)	75% internal volume (gal.)	Tread depth (32nd in.)		
34.2	74.6	33.5	221.5	DW27B (A)	DW30B (A)						43.9	272.9	71		
<b>Psi</b>	<b>15</b>	<b>19</b>	<b>23</b>	<b>28</b>	<b>32</b>	<b>33</b>	<b>35</b>	<b>36</b>	<b>38</b>	<b>39</b>	<b>41</b>	<b>42</b>	<b>46</b>	<b>51</b>	<b>55</b>
6 mph Cyc	14055	16965	19865	21550	23235	23800	24360	24925	25485	26050	26610	27040	28330	29630	30920
6 mph	12400	14715	17030	18705	20380	20935	21495	21990	22485	22985	23480	23865	25000	26145	27280
15 mph	10405	12300	14200	15390	16580	16975	17370	17770	18175	18575	18970	19280	20195		
20 mph	10030	11860	13680	14825	15985	16360	16745	17130	17515	17900	18285	18585	19465		
30 mph	9370	11080	12785	13865	14935	15300	15655	16015	16370	16735	17085	17360	18190		

Rim Size (inch)		Description										MSPN (CAI)			
32		1050/50 R32 178A8 TL M28 (for harvesting machinery)										94737 (236234)			
Section Width	Overall Diam. (in.)	Loaded Radius (in.)	Rolling Circum. (in.)	Recommended Rim	Acceptable Rims						Min. Dual / Triple Spacing (in.)	75% internal volume (gal.)	Tread depth (32nd in.)		
40.9	74.9	33.6	222.4	36.00VA							51.6	330.2	76		
<b>Psi</b>	<b>15</b>	<b>19</b>	<b>23</b>	<b>28</b>	<b>32</b>	<b>33</b>	<b>35</b>	<b>36</b>	<b>38</b>	<b>39</b>	<b>41</b>	<b>42</b>	<b>46</b>	<b>51</b>	<b>55</b>
6 mph Cyc	16360	19025	21695	23445	25190	25770	26355	26940	27525	28110					
10 mph Cyc	11795	14715	17635	20570	22905	23590	24275	24615	24955	25300	25640				
6 mph	15125	17470	19820	21175	22540	22995	23445	23900	24350	24800					
15 mph	12280	14340	16400	17140	17880	18120	18365								
20 mph	11840	13825	15805	16525	17230	17470	17705								
25 mph	11065	12920	14770	15430	16095	16315	16535								

\* Refer to the notes at the end of the tables of this range

# MEGAXBIB®

Tire specifications and pressure table. Load per tire in lbs.\*

Rim Size (inch)		Description										MSPN (CAI)			
34		620/75 R34 170A8/170B TL										83734 (325025)			
Section Width	Overall Diam. (in.)	Loaded Radius (in.)	Rolling Circum. (in.)	Recommended Rim	Acceptable Rims					Min. Dual / Triple Spacing (in.)	75% internal volume (gal.)	Tread depth (32nd in.)			
23.2	71.4	32.3	212.5	DW20B (A)	DW18L					31.5	161.7	58			
<b>Psi</b>	<b>15</b>	<b>19</b>	<b>23</b>	<b>28</b>	<b>32</b>	<b>33</b>	<b>35</b>	<b>36</b>	<b>38</b>	<b>39</b>	<b>41</b>	<b>42</b>	<b>46</b>	<b>51</b>	<b>55</b>
6 mph Cyc	11045	12270	13490	14725	15950	16360	16765	17175	17580	17990	18400	18805	20040	21265	22485
6 mph	10055	11100	12145	13195	14255	14595	14945	15300	15640	15995	16345	16700	17745	18795	19840
15 mph	8180	9060	9955	10835	11730	12025	12315	12610	12910	13205	13505	13800	14685		
20 mph	7895	8740	9600	10450	11310	11595	11870	12160	12445	12730	13020	13305	14155		
25 mph	7385	8180	8985	9775	10570	10835	11100	11365	11630	11905	12170	12435	13230		
30 mph	7385	8180	8985	9775	10570	10835	11100	11365	11630	11905	12170	12435	13230		

Rim Size (inch)		Description										MSPN (CAI)			
34		710/75 R34 178A8/178B TL										13589 (543107)			
Section Width	Overall Diam. (in.)	Loaded Radius (in.)	Rolling Circum. (in.)	Recommended Rim	Acceptable Rims					Min. Dual / Triple Spacing (in.)	75% internal volume (gal.)	Tread depth (32nd in.)			
27.2	74.8	33.4	221.9	DW23B (A)	DW21B (A), MW23B (A)					35.8	228	73			
<b>Psi</b>	<b>15</b>	<b>19</b>	<b>23</b>	<b>28</b>	<b>32</b>	<b>33</b>	<b>35</b>	<b>36</b>	<b>38</b>	<b>39</b>	<b>41</b>	<b>42</b>	<b>46</b>	<b>51</b>	<b>55</b>
6 mph Cyc	13800	15335	16865	18400	19930	20450	20955	21460	21980	22485	22995	23510	25045	26575	28110
6 mph	12565	13880	15190	16500	17815	18245	18685	19125	19555	19995	20435	20865	22180	23490	24800
15 mph	10250	11355	12465	13570	14670	15045	15410	15785	16150	16525	16885	17260	18365		
20 mph	9875	10945	12015	13075	14145	14505	14860	15210	15565	15930	16280	16635	17705		
25 mph	9235	10230	11235	12225	13215	13545	13880	14210	14540	14880	15210	15545	16535		
30 mph	9235	10230	11235	12225	13215	13545	13880	14210	14540	14880	15210	15545	16535		

Rim Size (inch)		Description										MSPN (CAI)			
38		620/70 R38 170A8/170B TL										99512 (476088)			
Section Width	Overall Diam. (in.)	Loaded Radius (in.)	Rolling Circum. (in.)	Recommended Rim	Acceptable Rims					Min. Dual / Triple Spacing (in.)	75% internal volume (gal.)	Tread depth (32nd in.)			
23.9	73.4	33.5	218.8	DW20B (A)	DW18L					31.5	155.1	69			
<b>Psi</b>	<b>15</b>	<b>19</b>	<b>23</b>	<b>28</b>	<b>32</b>	<b>33</b>	<b>35</b>	<b>36</b>	<b>38</b>	<b>39</b>	<b>41</b>	<b>42</b>	<b>46</b>	<b>51</b>	<b>55</b>
6 mph Cyc	11045	12270	13490	14725	15950	16360	16765	17175	17580	17990	18400	18805	20040	21265	22485
6 mph	10055	11100	12145	13195	14255	14595	14945	15300	15640	15995	16345	16700	17745	18795	19840
15 mph	8180	9060	9955	10835	11730	12025	12315	12610	12910	13205	13505	13800	14685		
20 mph	7895	8740	9600	10450	11310	11595	11870	12160	12445	12730	13020	13305	14155		
25 mph	7385	8180	8985	9775	10570	10835	11100	11365	11630	11905	12170	12435	13230		
30 mph	7385	8180	8985	9775	10570	10835	11100	11365	11630	11905	12170	12435	13230		

Rim Size (inch)		Description										MSPN (CAI)			
42		520/85 R42 162A8/162B TL (Textile belted)										15488 (645194)			
Section Width	Overall Diam. (in.)	Loaded Radius (in.)	Rolling Circum. (in.)	Recommended Rim	Acceptable Rims					Min. Dual / Triple Spacing (in.)	75% internal volume (gal.)	Tread depth (32nd in.)			
21.1	76.3	35	227.7	DW18L	DD18, W18L					26.4	144	71			
<b>Psi</b>	<b>15</b>	<b>19</b>	<b>23</b>	<b>28</b>	<b>32</b>	<b>33</b>	<b>35</b>	<b>36</b>	<b>38</b>	<b>39</b>	<b>41</b>	<b>42</b>	<b>46</b>	<b>51</b>	<b>55</b>
6 mph Cyc	8490	10085	11685	13605	14330	14595	14860	15135	15400	15665					
6 mph	8795	10805	12810	14100	15060	15375	15585	15805	16015	16225					
15 mph	7340	8720	10095	10780	11320	11475	11630								
20 mph	7075	8410	9735	10395	10915	11065	11210								
30 mph	6615	7860	9095	9710	10195	10340	10470								
20 mph Dual	6230	7395	8565	9150	9600	9735	9865								

\* Refer to the notes at the end of the tables of this range

# MEGAXBIB®

Tire specifications and pressure table. Load per tire in lbs.\*

Rim Size (inch)		Description									MSPN (CAI)				
42		620/70 R42 166A8/166B TL (Textile belted)									15145 (100268)				
Section Width	Overall Diam. (in.)	Loaded Radius (in.)	Rolling Circum. (in.)	Recommended Rim	Acceptable Rims					Min. Dual / Triple Spacing (in.)	75% internal volume (gal.)	Tread depth (32nd in.)			
25.2	77.2	34.8	230.6	DW20B (A)	DW18L, MW20B (A)					31.5	173.8	71			
<b>Psi</b>	<b>15</b>	<b>19</b>	<b>23</b>	<b>28</b>	<b>32</b>	<b>33</b>	<b>35</b>	<b>36</b>	<b>38</b>	<b>39</b>	<b>41</b>	<b>42</b>	<b>46</b>	<b>51</b>	<b>55</b>
6 mph Cyc Dual	8995	10750	12500	14255	15500	15830	16160	16490	16820	17150	17485				
6 mph	9015	10780	12535	14295	15545	15875	16205	16535	16865	17195	17525				
25 mph	7165	8545	9920	10580	11245	11465	11685								
30 mph	7165	8545	9920	10580	11245	11465	11685								
20 mph Dual	6745	8045	9350	9965	10595	10790	11000								

**\*IMPORTANT:**

The inflation pressure must always be appropriate for the load per tire, the speed of travel and the work to be done. Our recommendations above are provided subject to changes made after the date of publication of these tables (June 2018). Technical data is subject to change without prior notice.

- For standard or slope correction machines working on slopes of over 20% (11°), use the 6 mph non-cyclic curve.
- For heavy road use exceeding 50% add 6 psi.
- 6, 10 or 20 mph cyclic load, use in the field only, travel with full load not to exceed 1 mile.