



REGIONAL APPLICATIONS

THE MICHELIN® XPS TRACTION® TIRE

All-steel, all-wheel-position light truck tire designed to deliver excellent on/off road traction and retreadability for commercial/fleet operations.

Line Haul	Regional	Urban	On/Off Road
<input checked="" type="checkbox"/> Recommended	<input checked="" type="checkbox"/> Recommended	<input checked="" type="checkbox"/> Recommended	<input checked="" type="checkbox"/> Recommended
<input type="checkbox"/> Acceptable	<input type="checkbox"/> Acceptable	<input type="checkbox"/> Acceptable	<input type="checkbox"/> Acceptable




business.michelinman.com



MICHELIN

THE MICHELIN® XPS TRACTION® TIRE

All-steel, all-wheel-position light truck tire designed to deliver excellent on/off road traction and retreadability for commercial/fleet operations.

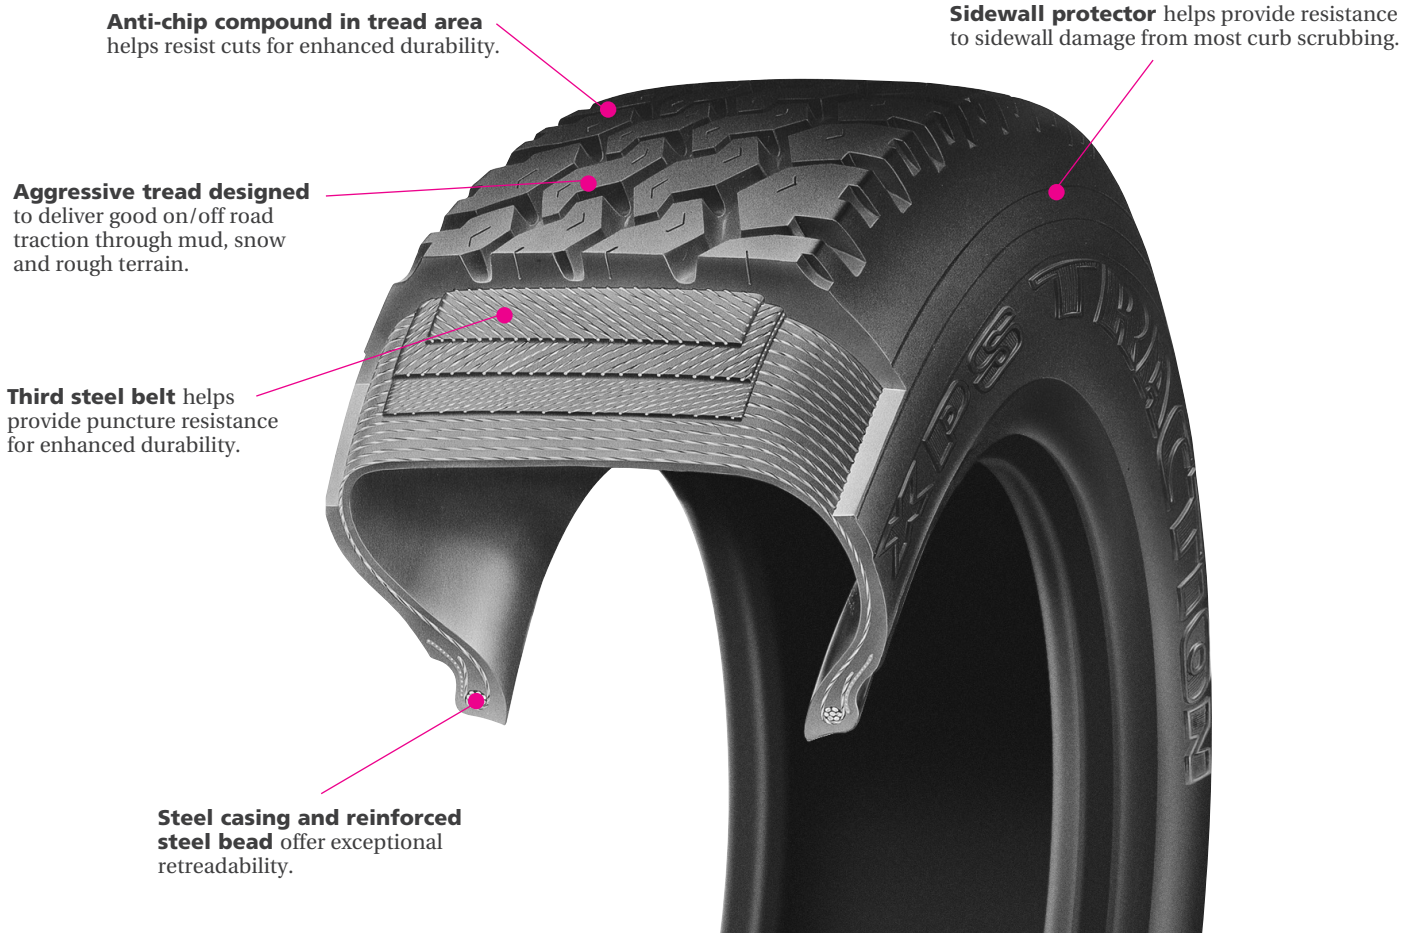

Size (1)	Load Range	Catalog Number	Tread Depth 32nds	Overall Width (2)			Load/Speed Rating	Overall Diameter		Rim Width Range (3)	Min. Dual Spacing (2)		Revs Per Mile (at 45 mph)	Max. Tire Load Single				Max. Tire Load Dual			
				in	mm	rim		in	mm		in	mm		psi	kg.	kPa	lbs.	psi	kg.	kPa	
LT215/85R16	E	35260	17	8.8	224	6.0"	115/112/Q	30.7	780	5.5" - 7.0"	9.9	252	681	2680	80	1215	550	2470	80	1120	550

NOTE: All comparisons are between MICHELIN® tires within this category.

(1) Exceeding the lawful speed limit is neither recommended nor endorsed.


(2) Tire section widths and overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

(3) Range of approved wheel widths. For specific wheel profiles and measuring wheel, refer to "MICHELIN® Data Book" No. MDL41080.

WARNING: Serious or fatal injury may result from tire failure due to underinflation/overinflation/overloading.

To ensure correct pressure and vehicle load, refer to vehicle owner's manual or tire information placard in the vehicle. Serious injury or death may result from explosion of tire/wheel assembly due to improper mounting. Only tire professionals should mount tires, and they should never inflate beyond 40 psi to seat the beads. See Tire Dealer for proper mounting. Before mixing types of tires in any configuration on any vehicle, be sure to check the vehicle owner's manual for recommendations.

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations. MNA, Inc. continually updates its product information to reflect any changes in Industry Standards. Printed material may not reflect the current Load and Inflation information. Please visit www.michelinbusiness.com for the latest product information. The actual load and inflation pressure used must not exceed the wheel manufacturer's maximum conditions. Never exceed a wheel manufacturer's limits without permission from the component manufacturer.

 TO FIND OUT MORE
US: business.michelinman.com
CA: business.michelin.ca

 FIND US ON FACEBOOK
[michelintruck](https://www.facebook.com/michelintruck)

 CONTACT US ON THE WEB
US: business.michelinman.com/contact-us
CA: business.michelin.ca/contact-us

 CONTACT US BY TELEPHONE
US: 1-888-622-2306
CA: 1-888-622-2306