



REGIONAL & URBAN APPLICATIONS

THE MICHELIN® XZE® 19.5 TIRE

Exceptional all-position radial with extra-wide, extra-deep tread designed to help deliver our best wear in high scrub regional and urban applications.

Line Haul	Regional	Urban	On/Off Road
<input checked="" type="checkbox"/> Recommended	<input checked="" type="checkbox"/> Recommended	<input checked="" type="checkbox"/> Recommended	<input type="checkbox"/> Acceptable

Provides up to 34% more miles than leading competitors.⁽¹⁾



**MAXIMIZED
TREAD LIFE**


**SUPERIOR
TRACTION**

(1) Based on a treadwear test using tires in size 225/70 R19.5 LRG on a RAM 4500 versus the CONTINENTAL® HSR+™, BRIDGESTONE® R238™, and GOODYEAR® G647 RSS®. Actual on-road results may vary.




THE MICHELIN® XZE® 19.5 TIRE

Exceptional all-position radial with extra-wide, extra-deep tread designed to help deliver our best wear in high scrub regional and urban applications.

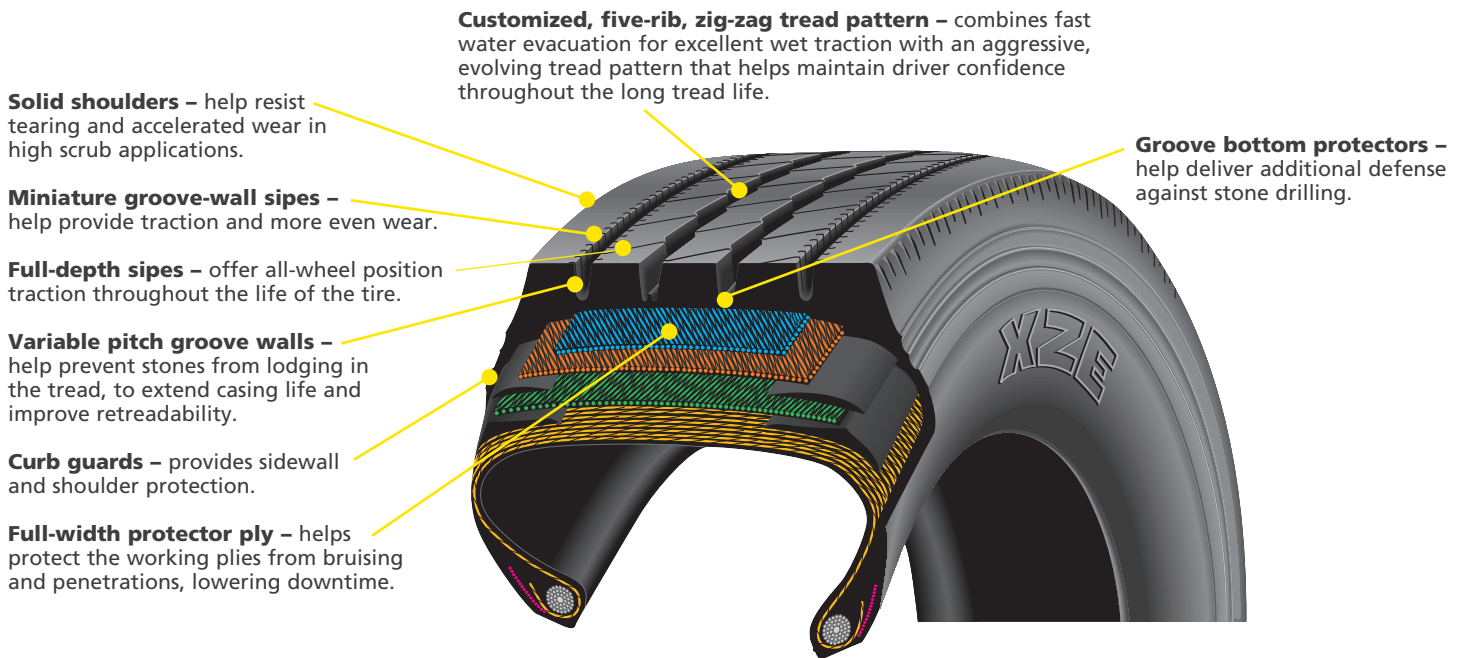

MAXIMIZED TREAD LIFE

Provides up to 34% more miles than leading competitors. (1)

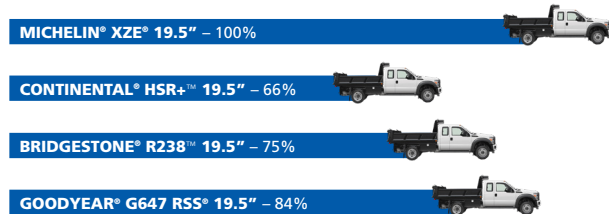

SUPERIOR TRACTION

Better wet grip than leading competitors. (2)

- Better maneuverability to help safely navigate urban and regional roads.
- Better wet braking to help stop safely.

Size	Load Range	Catalog Number	Tread Depth 32nds	Max. Speed (*)		Loaded Radius		Overall Diameter		Overall Width (‡)		Approved Wheels (Measuring wheel listed first.)	Min. Dual Spacing (‡)		Revs Per Mile	Max. Load and Pressure Single				Max. Load and Pressure Dual			
				mph	kph	in.	mm	in.	mm	in.	mm		in	mm		lbs.	psi	kg.	kPa	lbs.	psi	kg.	kPa
225/70R19.5	G	91043	17	87	140	15.2	385	32.2	819	9.3	237	6.75, 6.00	10.0	254	640	3970	110	1800	760	3750	110	1700	760
245/70R19.5	H	75997	18	75	120	15.6	396	33.6	853	9.7	247	6.75, 7.50	10.7	272	619	4940	120	2240	830	4675	120	2120	830

Note: Wheel listed first is the measuring wheel.

(*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(‡) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

(1) Based on a treadwear test using tires in size 225/70 R19.5 LRG on a RAM 4500 versus the CONTINENTAL® HSR+™, BRIDGESTONE® R238™, and GOODYEAR® G647 RSS®. Actual on-road results may vary.

(2) Based on internal wet braking test at 60 mph (97 kph) using size 225/70R19.5 on asphalt measuring peak Mu, using the MICHELIN® XZE® vs. CONTINENTAL® HSR+™, BRIDGESTONE® R238™, and GOODYEAR® G647 RSS®. Actual on-road results may vary.

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations.

MNA, Inc. continually updates its product information to reflect any changes in Industry Standards. Printed material may not reflect the current Load and Inflation information.

Please visit business.michelinman.com for the latest product information. The actual load and inflation pressure used must not exceed the wheel manufacturer's maximum conditions. Never exceed a wheel manufacturer's limits without permission from the component manufacturer.

TO FIND OUT MORE
US: business.michelinman.com
CA: business.michelin.ca

FIND US ON FACEBOOK
[michelintruck](https://www.facebook.com/michelintruck)

CONTACT US ON THE WEB
US: business.michelinman.com/contact-us
CA: business.michelin.ca/contact-us

CONTACT US BY TELEPHONE
US: 1-888-622-2306
CA: 1-888-622-2306