



REGIONAL & URBAN APPLICATIONS

THE MICHELIN® XZE 2™ TIRE

Exceptional regional, all-position radial with extra-wide, extra-deep tread designed to help deliver our best wear in high scrub regional and urban applications.

Line Haul	Regional	Urban	On/Off Road
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Recommended Acceptable



Exceptional regional, all-position radial with extra-wide, extra-deep tread designed to help deliver our best wear in high scrub regional and urban applications.

Matrix Siping technology helps prevent irregular wear and increase traction. The 3D Matrix Sipes lock together for the stability normally associated with solid tread blocks.

Enhanced application specific compounds to promote resistance to aggressions and longer tread life.

Rib edge micro sipes helps protect against irregular wear.


Zig-zag grooves help increase traction in new and worn tire conditions.

Groove bottom protectors protects against stone drilling.

Full-width, elastic protector ply helps protect the working plies from bruising and penetrations.

Rectangular bead bundle – a Michelin exclusive – simulates a solid steel rod “strapping” the tire onto the wheel. This design stabilizes the entire bead region and minimizes fatigue in order to extend casing life.

Extra strong curb guards help protect sidewalls against most impacts and abrasions for long casing life.

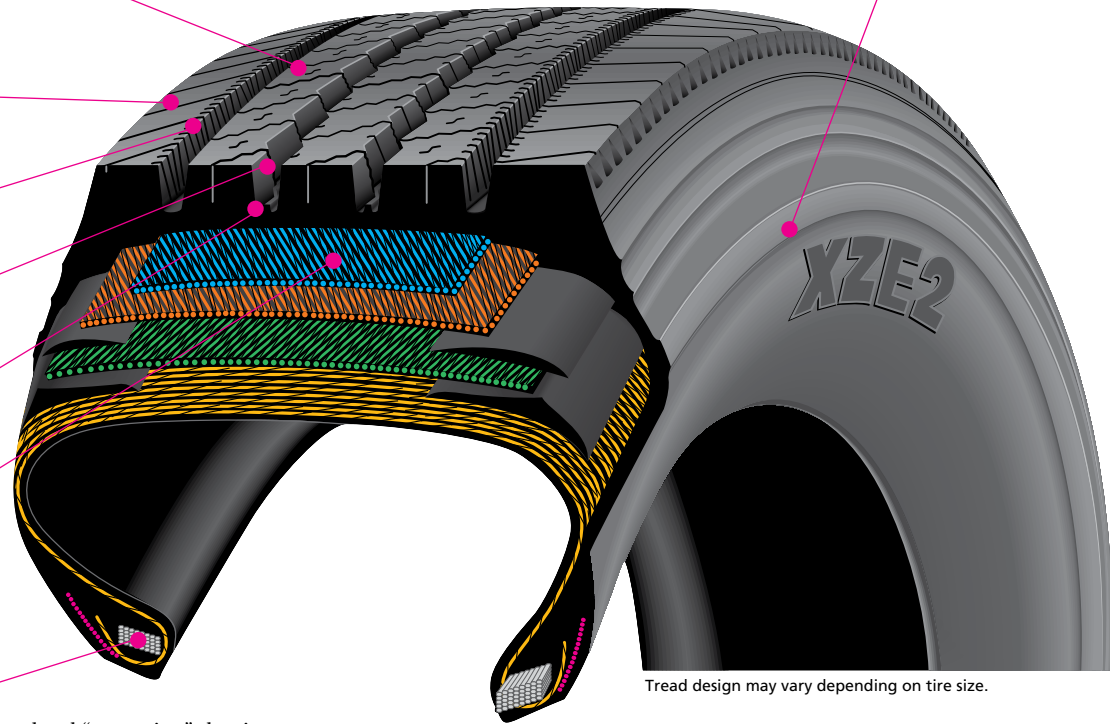

Size	Load Range	Catalog Number	Tread Depth 32nds	Max. Speed (*)		Loaded Radius		Overall Diameter		Overall Width (‡)	Approved Wheels (Measuring wheel listed first.)	Min. Dual Spacing (‡)		Revs Per Mile	Max. Load and Pressure Single				Max. Load and Pressure Dual				
				mph	kph	in.	mm	in.	mm			in.	mm		in.	mm	lbs.	psi	kg.	kPa	lbs.	psi	kg.
11R22.5	G	78390	22	75	120	19.3	491	41.3	1050	11.2	285	8.25, 7.50	12.5	318	501	6175	105	2800	720	5840	105	2650	720
11R22.5	H	67042	22	75	120	19.2	488	41.4	1051	11.3	286	8.25, 7.50	12.5	318	501	6610	120	3000	830	6005	120	2725	830
275/80R22.5	G	55895	22	75	120	18.6	473	40.2	1021	11.1	282	8.25, 7.50	12.2	311	517	6175	110	2800	760	5675	110	2575	760
11R24.5	G	91867	22	75	120	20.3	516	43.5	1104	11.1	281	8.25, 7.50	12.5	318	476	6610	105	3000	720	6005	105	2725	720
11R24.5	H	88507	22	75	120	20.3	516	43.5	1104	11.1	281	8.25, 7.50	12.5	318	476	7160	120	3250	830	6610	120	3000	830
275/80R24.5	G	75519	22	75	120	19.3	490	41.3	1050	10.8	274	8.25, 7.50	12.2	311	501	6175	110	2800	760	5675	110	2575	760

Note: Wheel listed first is the measuring wheel.

(*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(‡) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations. Please consult wheel manufacturer's load and inflation limits. Never exceed wheel manufacturer's limits without permission of component manufacturer.

TO FIND OUT MORE
US: business.michelinman.com
CA: business.michelin.ca

FIND US ON FACEBOOK
[michelintruck](https://www.facebook.com/michelintruck)

CONTACT US ON THE WEB
US: business.michelinman.com/contact-us
CA: business.michelin.ca/contact-us

CONTACT US BY TELEPHONE
US: 1-888-622-2306
CA: 1-888-622-2306