



ON/OFF ROAD APPLICATIONS

THE MICHELIN® X® WORKS XDY® TIRE

Next generation on/off road drive tire optimized for exceptional traction and wear in mixed and severe service for on/off road applications.

Line Haul	Regional	Urban	On/Off Road
-----------	----------	-------	--------------------

Recommended Acceptable



www.michelintruck.com



MICHELIN

THE MICHELIN® X® WORKS XDY® TIRE

Next generation on/off road drive tire optimized for exceptional traction and wear in mixed and severe service for on/off road applications.

Improved Traction⁽¹⁾

More efficient mud-removal.

- New Directional Tread Design
- Robust Center Tread Region

10% Increase in Removal Mileage⁽¹⁾

Longer tread life.

- New Wider Tread Design

Maximum Mileage and Casing Life

Co-Ex Technology.

- Anti-cut/chip compound for long tread life
- Cool tread rubber reduces temperatures in crown area to preserve the casing

Excellent Retreadability

Fight casing fatigue.

- Robust Four Steel Belt Construction

Preserve belt package from impacts.

- Shock Pads


Reduce bead damage during mounting and demounting.

- Rounded Bead Toe Design

Maximum Sidewall Protection

Severe service protection against aggression, chipping and scaling.

- Extra-Thick Sidewall

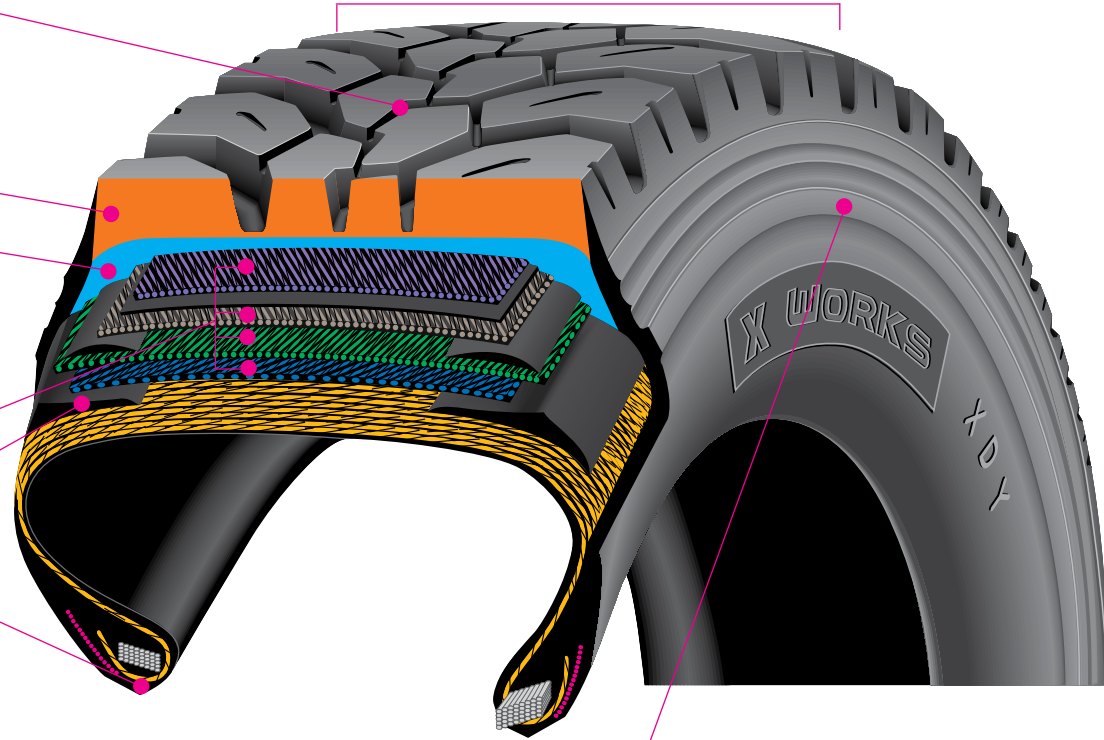

Size	Load Range	Catalog Number	Tread Depth 32nds	Max. Speed (*) mph	Loaded Radius		Overall Diameter		Overall Width (‡)		Approved Wheels (Measuring wheel listed first.)	Min. Dual Spacing (‡)		Revs Per Mile	Max. Load and Pressure Single				Max. Load and Pressure Dual			
					in.	mm	in.	mm	in.	mm		in.	mm		lbs.	psi	kg.	kPa	lbs.	psi	kg.	kPa
11R22.5 ⁽²⁾	H	89725	30	65	19.7	499	41.9	1065	11.3	287	8.25, 7.50	12.5	318	493	6610	120	3000	830	6005	120	2725	830
315/80R22.5 ^(2,3)	L	55576	28	65	20.0	507	43.0	1091	12.5	317	9.00, 9.75	13.8	351	486	9090	130	4125	900	8270	130	3750	900
11R24.5 ⁽²⁾	H	90022	30	65	20.7	525	44.0	1118	11.3	288	8.25, 7.50	12.5	318	469	7160	120	3250	830	6610	120	3000	830

Note: Wheel listed first is the measuring wheel.
(1) When compared to the MICHELIN® XDY®3 tire.

(2) Directional tread design.

(3) Not approved for use with an 8.25 wheel on vehicles produced after January 1, 2018.

(*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(‡) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations.

MNA, Inc. continually updates its product information to reflect any changes in Industry Standards. Printed material may not reflect the current Load and Inflation information. Please visit www.michelintruck.com for the latest product information. The actual load and inflation pressure used must not exceed the wheel manufacturer's maximum conditions. Never exceed a wheel manufacturer's limits without permission from the component manufacturer.

TO FIND OUT MORE
michelintruck.com

FIND US ON FACEBOOK
michelintruck.com

CONTACT US BY EMAIL
michelintruck.com/contact-us/

CONTACT US BY TELEPHONE
1-888-622-2306

Michelin North America Inc., One Parkway South, Greenville, SC 29615, 1-888-622-2306

Copyright © 2018 Michelin North America, Inc. The Michelin Man is a registered trademark owned by Michelin North America, Inc. All rights reserved.

An Equal Opportunity Employer (07/18)